


View 1

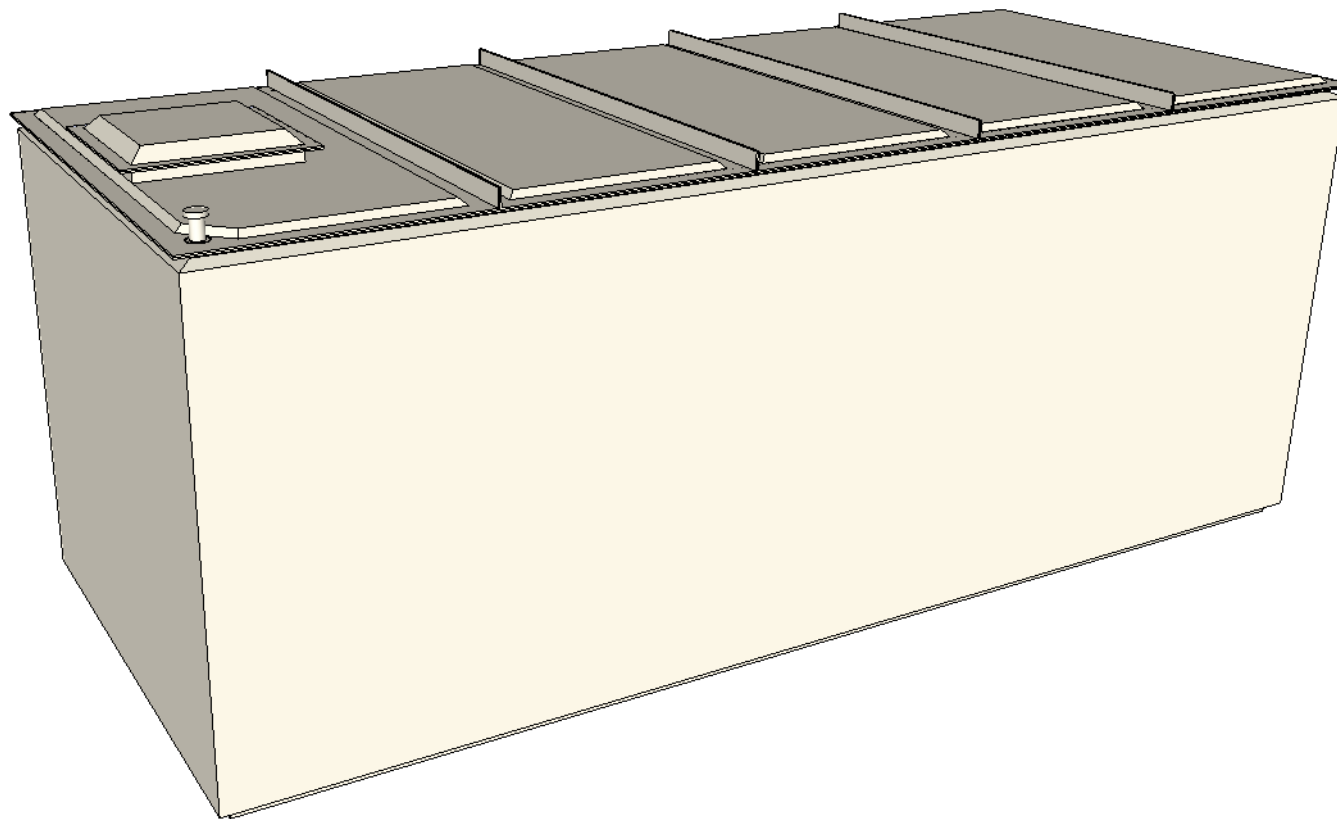

**Notes:**

- a) All dimensions are approximate and may change without notice. If dimensions are required for a specific purpose such as sizing framework these can be provided on request.
- b) Insulation 50mm PU foam encapsulated within a GRP outer skin. U-value 0.4 W/m2K
- c) Recesses for connections are factory formed (standard positions shown dotted).
- d) Holing of tank and fitting connections by others unless ordered.
- e) Tank sides may have a small draw angle for moulding purposes


**Model: ANP4400/2**

**Capacity (nominal): 20,000 litre      4400 gal**

**ISSUE**  
9/9/13

**DRAWN BY**  
SC

View 2

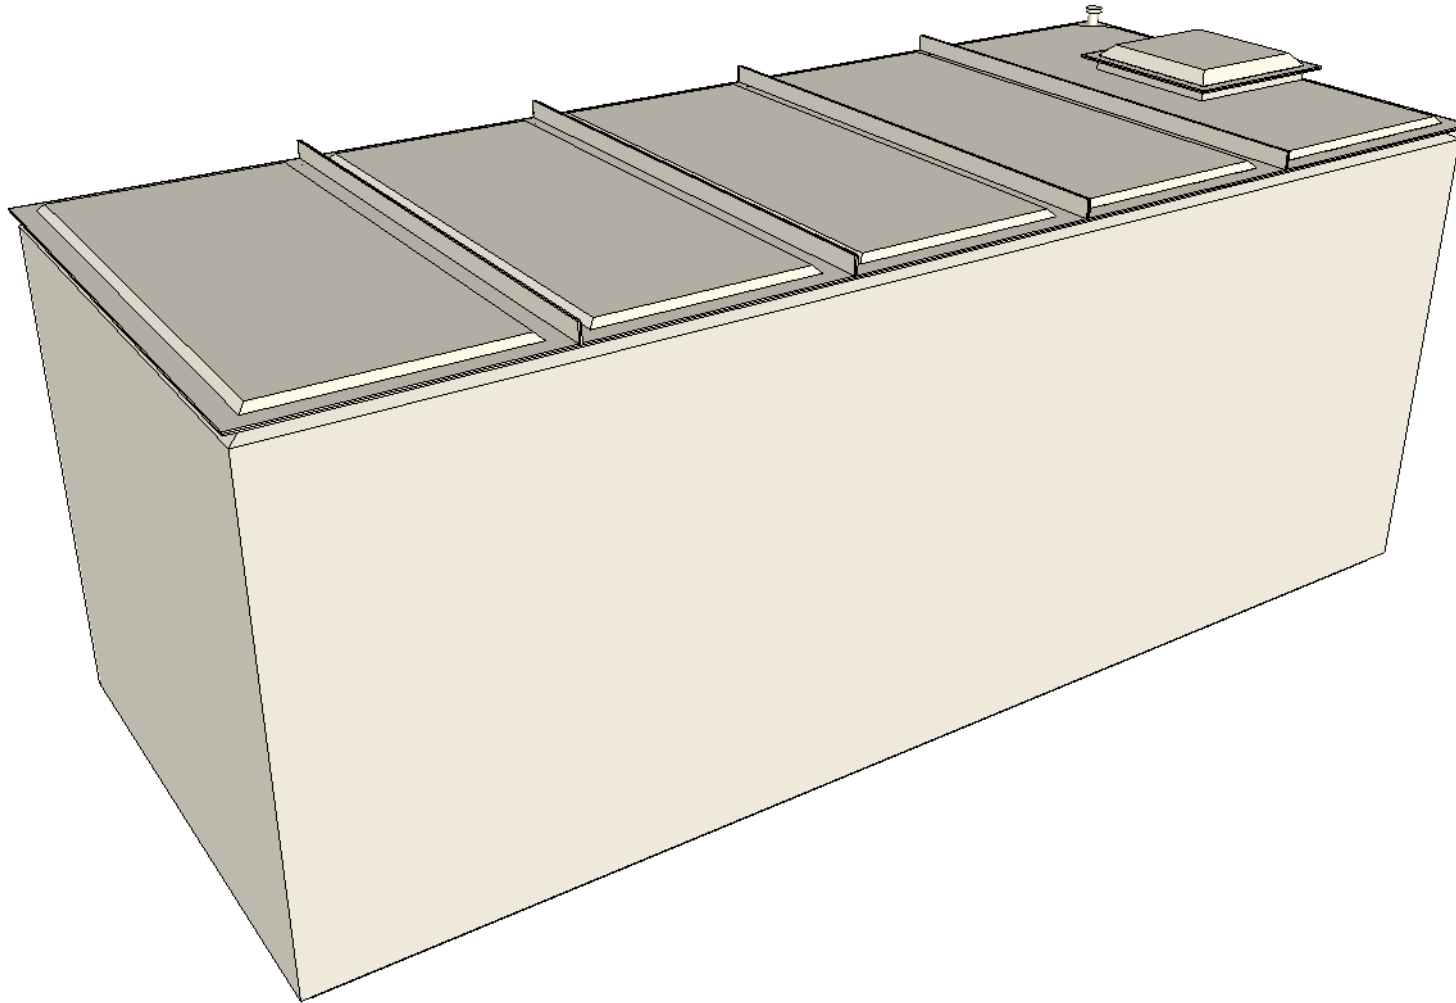


**Model: ANP4400/2**  
**Capacity (nominal): 20,000 litre      4400 gal**

**ISSUE**  
9/9/13

**DRAWN BY**  
SC

Plan

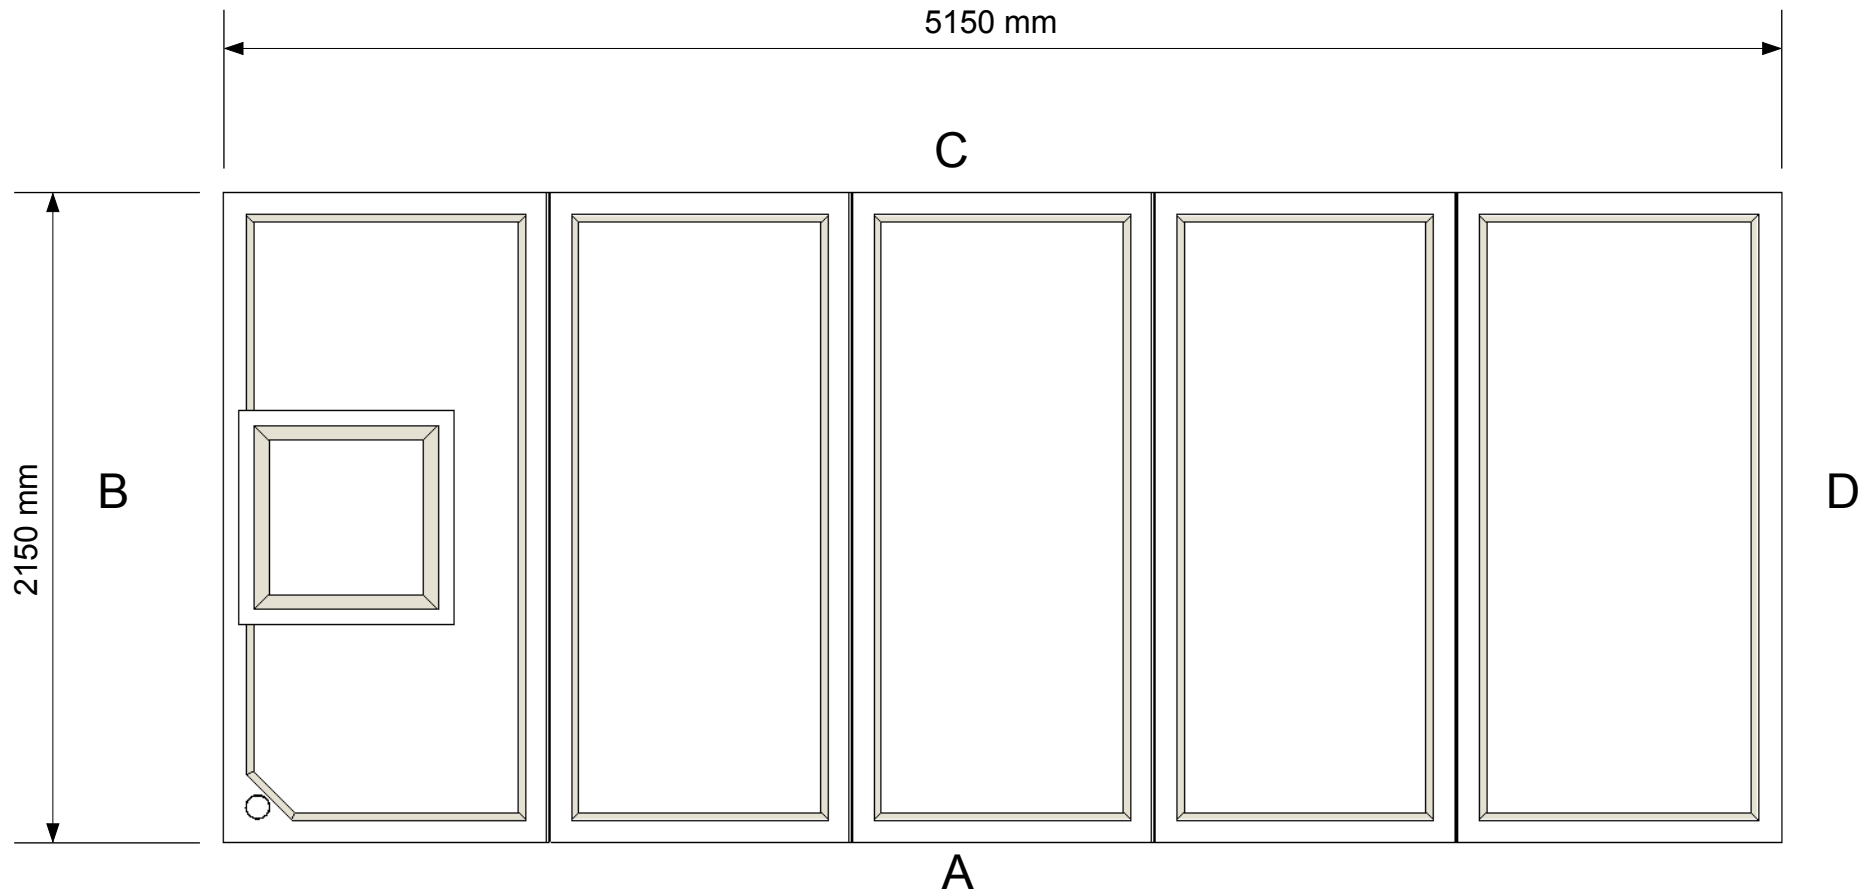

**Model: ANP4400/2**

**Capacity (nominal): 20,000 litre      4400 gal**

**ISSUE**  
9/9/13

**DRAWN BY**  
SC

# Elevation A




**Model: ANP4400/2**

**Capacity (nominal): 20,000 litre      4400 gal**

**ISSUE**  
9/9/13

**DRAWN BY**  
SC

# Elevation B

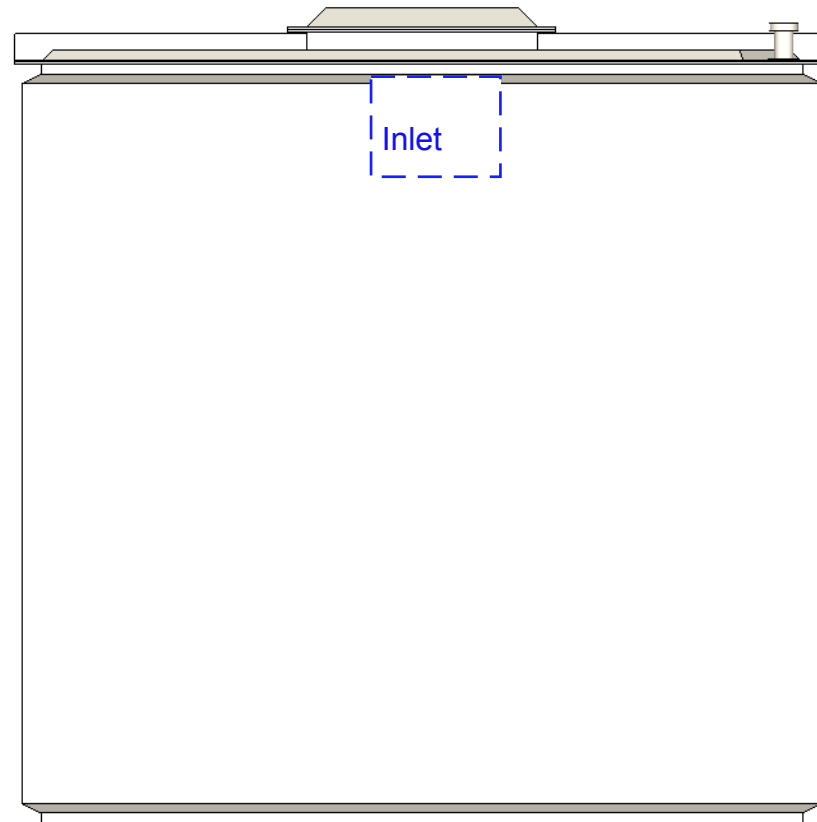


**Model: ANP4400/2**

**Capacity (nominal): 20,000 litre      4400 gal**

**ISSUE**  
9/9/13

**DRAWN BY**  
SC

# Elevation C




**Model: ANP4400/2**

**Capacity (nominal): 20,000 litre      4400 gal**

**ISSUE**  
9/9/13

**DRAWN BY**  
SC

# Elevation D

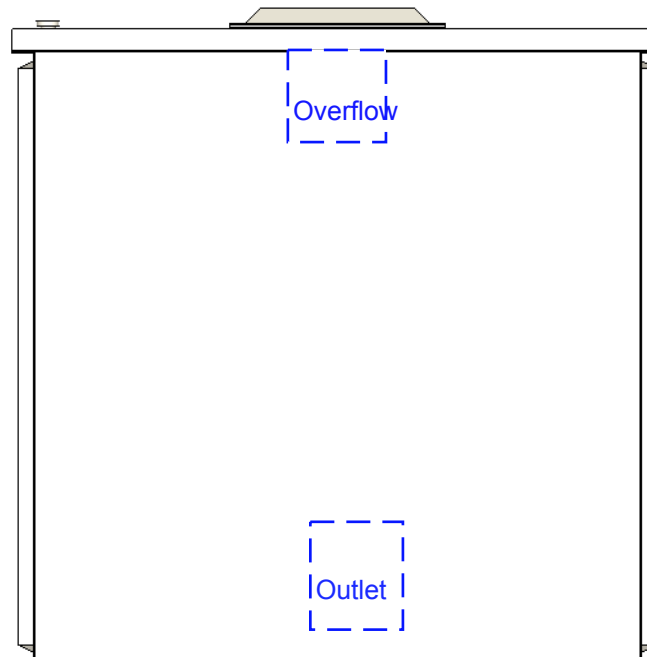

**Model: ANP4400/2**

**Capacity (nominal): 20,000 litre      4400 gal**

**ISSUE**  
9/9/13

**DRAWN BY**  
SC